


# SERIES THERMAL BREAK TILT&TURN WINDOW

## NFRC Certificate Specification

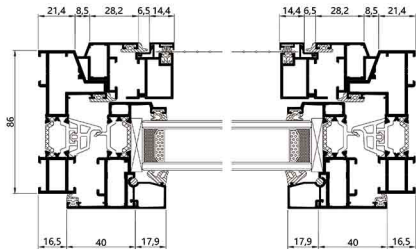


### PRODUCT CONFIGURATION

Frame Material: 6066-T6 Aluminium  
 Alu-Thickness: 1.8mm 2.0mm  
 Glass Type: Tempered glass, single or double  
 Glass Thickness: 5mm, 6mm, 8mm & 10mm  
 Accessories: Included  
 Color: Ral powder coat or anodized



Accessories:

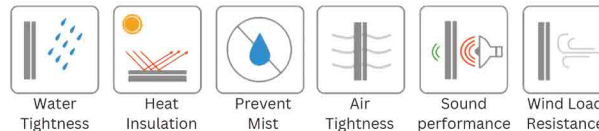

	Width	Height
<b>Max</b>	47.2441"	94.4882"
<b>Min</b>	19.685"	25.5906"

<b>U-Factor</b>	0.20	
<b>SHGC</b>	0.36	
<b>VT</b>	0.41	
<b>DP</b>	Class CW-PG60	
<b>CR</b>	67	
<b>STC</b>	38	
<b>Specification</b>	5mm/5mm/5mm	39mm. IGO
	0.197"/0.197"/0.197"	1.54". IGO
<b>Triple glass</b>		

<b>U-Factor</b>	0.27	
<b>SHGC</b>	0.35	
<b>VT</b>	0.40	
<b>DP</b>	Class CW-PG60	
<b>CR</b>	49	
<b>STC</b>	32	
<b>Specification</b>	5mm/5mm	34mm. IGO
	0.197"/0.197"	1.34". IGO
<b>Double glass</b>		